

# FOILBOARD® INSULATION SYSTEMS

# INSTALLATION GUIDE

GARAGE DOOR

To achieve maximum thermal performance and to ensure fast and simple installation of Foilboard® GREEN rigid insulation panel to garage doors, Foilboard Australia recommends the following method.

## What do you need?



Foilboard® Silver Joining tape


Spacer Blocks (Optional)



## How to Install?




Foilboard GREEN rigid insulation panel should be installed to the internal face of the garage door.

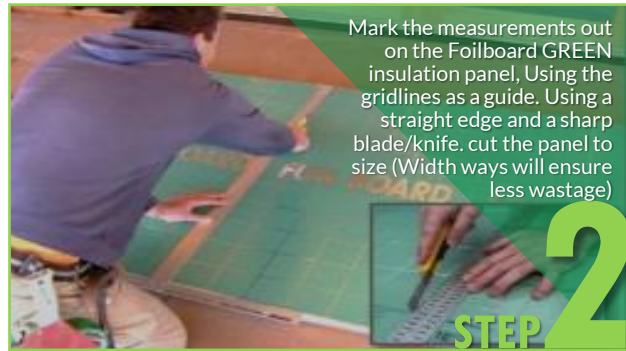

Mark the measurements out on the Foilboard GREEN insulation panel, Using the gridlines as a guide. Using a straight edge and a sharp blade/knife, cut the panel to size (Width ways will ensure less wastage)



Use Foilboard spacer blocks to maintain an airspace between the Foilboard and the garage door to increase insulation performance.

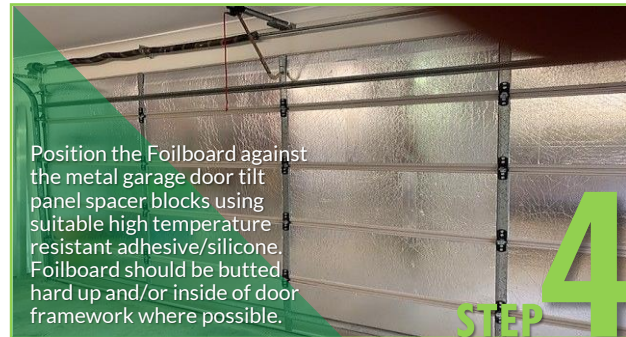

Position the Foilboard against the metal garage door tilt panel spacer blocks using suitable high temperature resistant adhesive/silicone. Foilboard should be butted hard up and/or inside of door framework where possible.



Tape any penetrations or joins with Foilboard Silver insulation tape, to minimise hot/cold air transfer. Foilboard comes in a range of thicknesses to suit any project

- ✔ Install the Foilboard® with the silver side facing out. This will retain brightness of the garage space.
- ✔ Fill in any remaining sections with smaller off cuts to help minimise wastage
- ✔ Using Foilboard® Spacer blocks to provide an air cavity greatly increases insulation performance

## TOP TIPS



*It's the smarter way to insulate*

INFORMATION HOTLINE: 1800 354 717  
www.foilboard.com.au