

The following steps will demonstrate the easiest installation method while ensuring optimal thermal performance for your project.

This guide shows how Foilboard panels and spacer blocks are fixed in place using high temperature water based adhesive or silicone. Spacer blocks create an air gap which increases thermal performance.

## ACCESSORIES




Foilboard Silver Joining Tape




Foilboard Spacer Blocks




## INSTALLATION

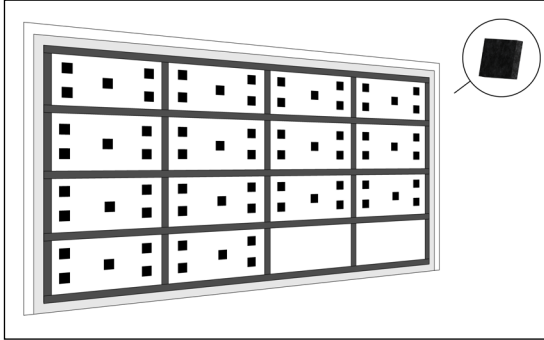


**STEP 1** Attach Foilboard spacer blocks to the door surface, evenly spacing 5-6 spacer blocks per section, with high temperature water based silicone.

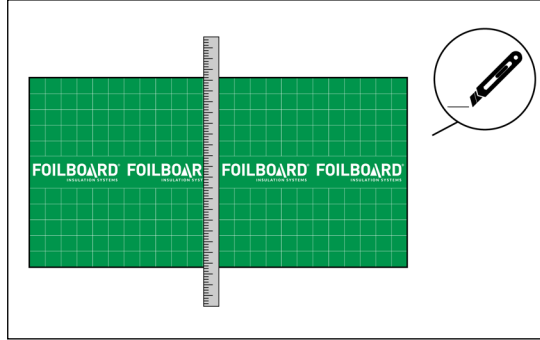


**STEP 2** Measure and cut the Foilboard panel to fit as close to the door framework as possible. Use a straight edge and sharp knife when cutting.

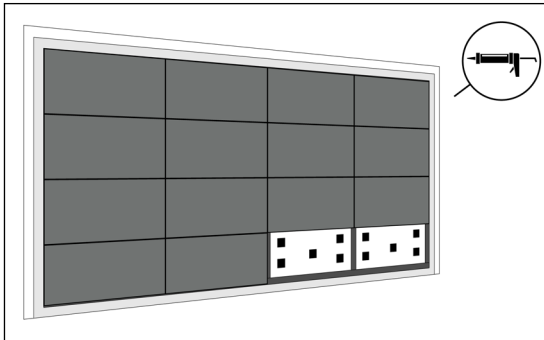

**STEP 3** Apply small amount of adhesive or silicone to spacer blocks on door. Slide each measured and cut panel into frame. Allow adhesive to cure.

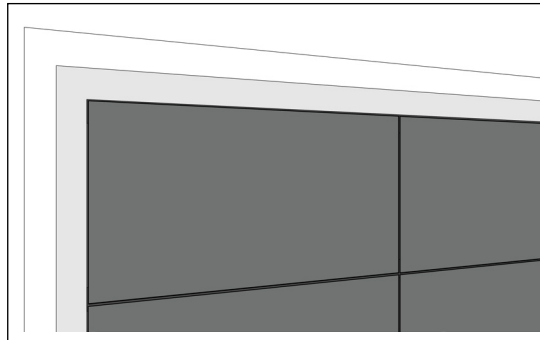

**STEP 4** Foilboard panels should be positioned between the lip of the door framework and Foilboard spacer blocks to hold them in place.

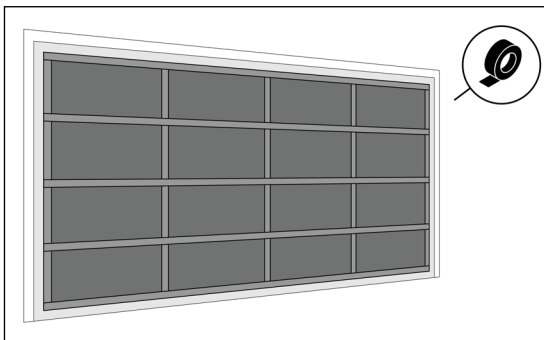

**STEP 5** Tape any joints or gaps using Foilboard silver tape.

## PRO TIPS

- Foilboard panel should be installed to the internal face of the garage door.
- Install the Foilboard with the silver side facing out. This will retain brightness of the garage space.
- Using Foilboard Spacer blocks to provide an air cavity greatly increases insulation performance.
- Ensure your surfaces are cleaned, dry and dust free prior to installation.

INFORMATION LINE  
1800 354 717

[www.foilboard.com.au](http://www.foilboard.com.au)

